




LAGERHYLLA ZIRKON



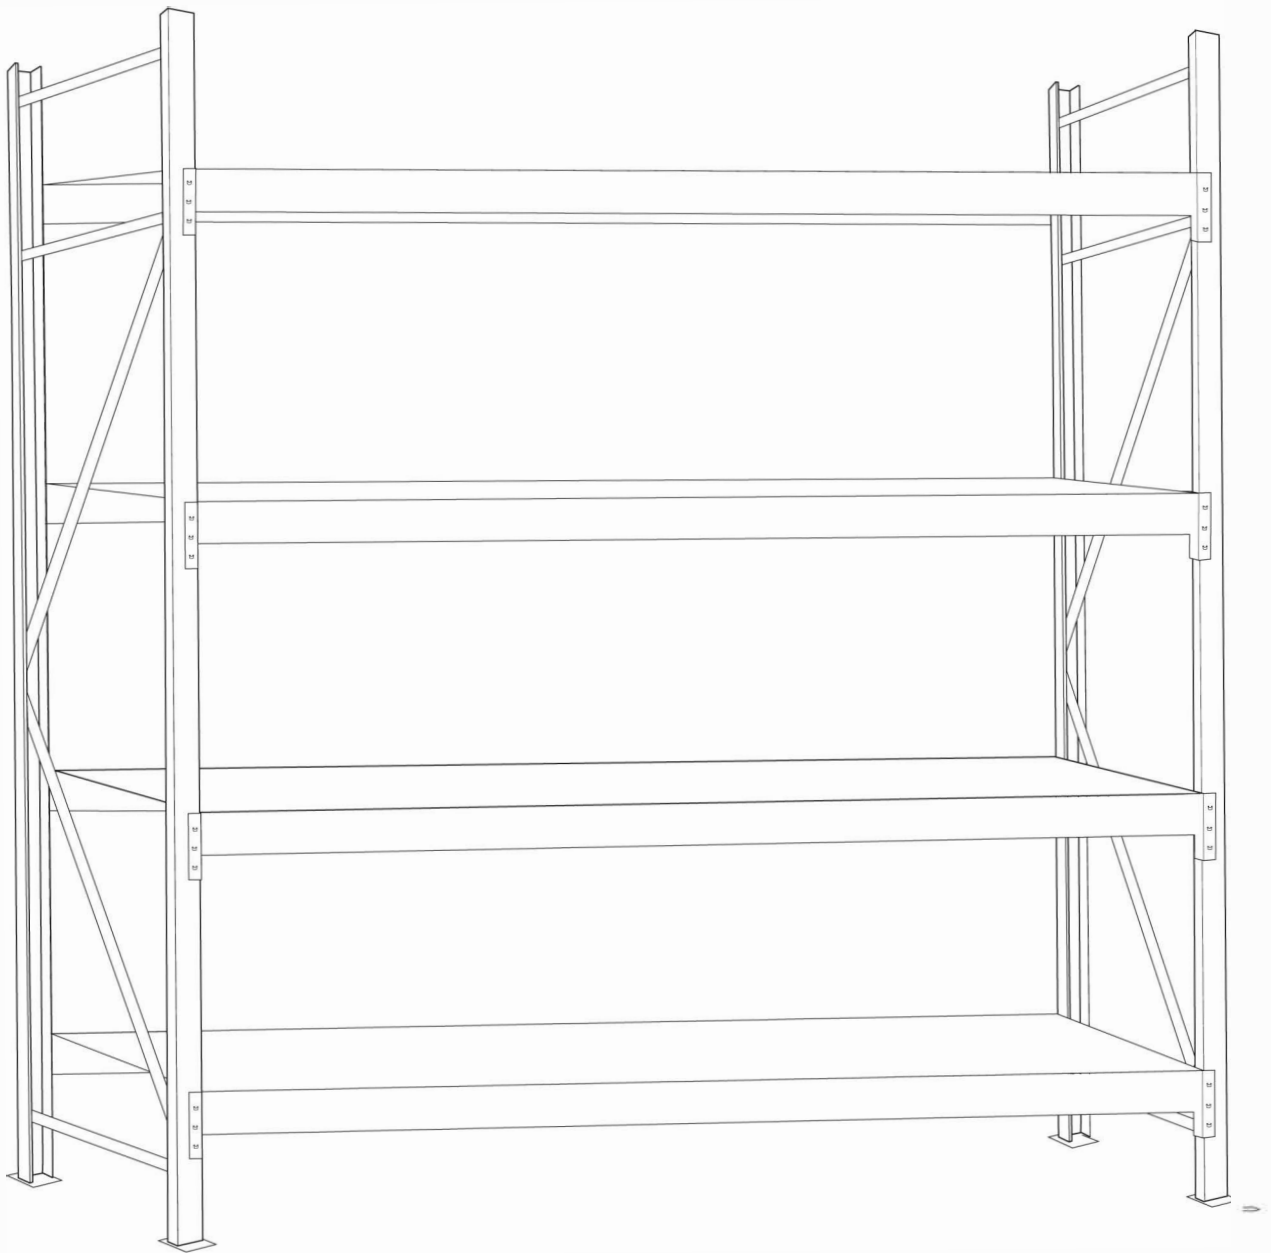

1

Place the first upright up against the wall.



2


Mount the first beam approx. 40 cm above the floor.



3


Safety clip is pressed in place.



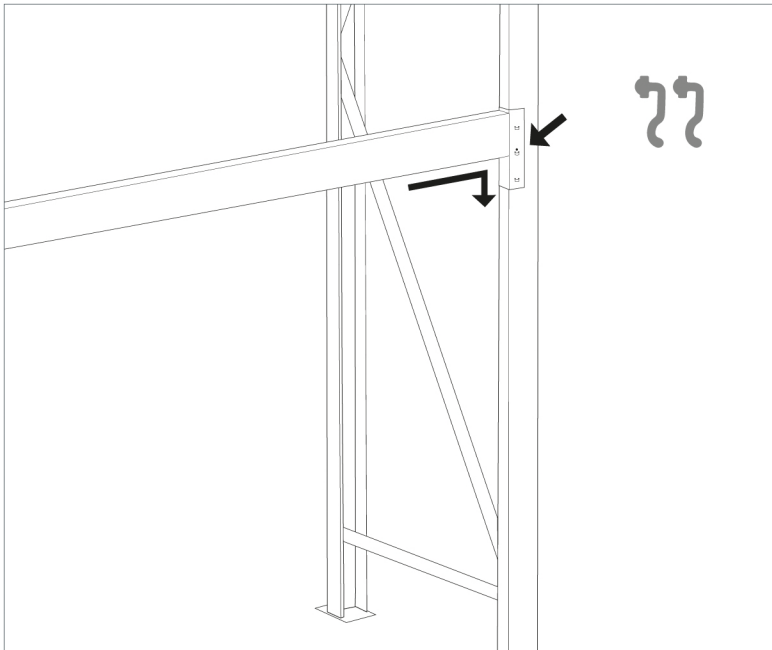


4

The beam is mounted to the next upright.

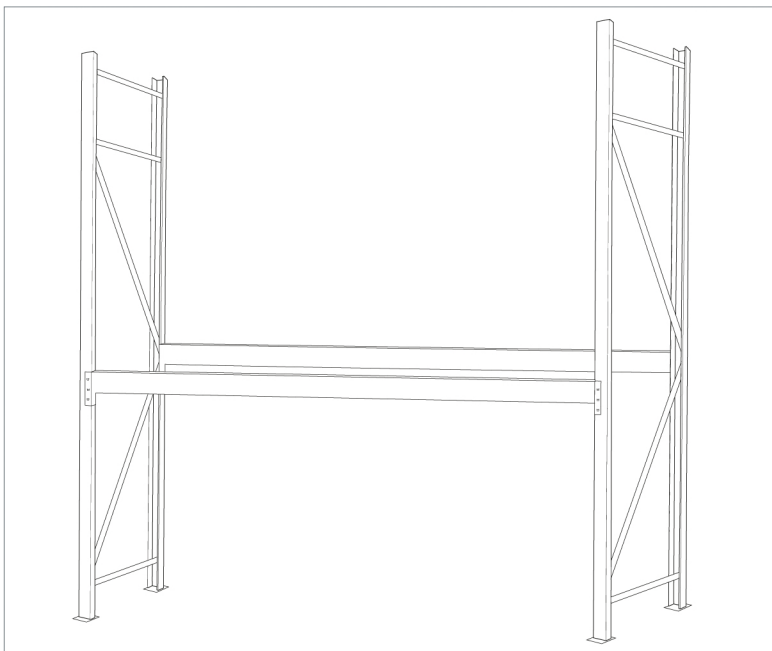

5


The second beam is mounted, and then repeat the process.

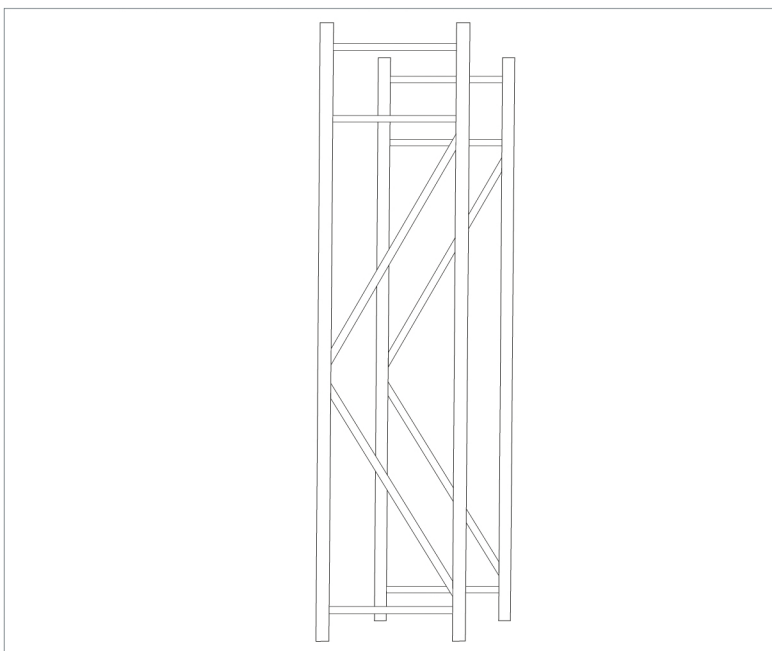

6


It is recommended that the uprights are placed symmetrically.

7

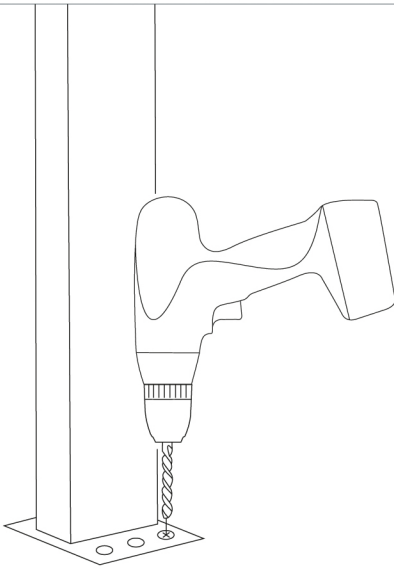

After the mounting is completed, the uprights are adjusted and secured with anchor bolts.

BELASTNINGSOVERSIGT

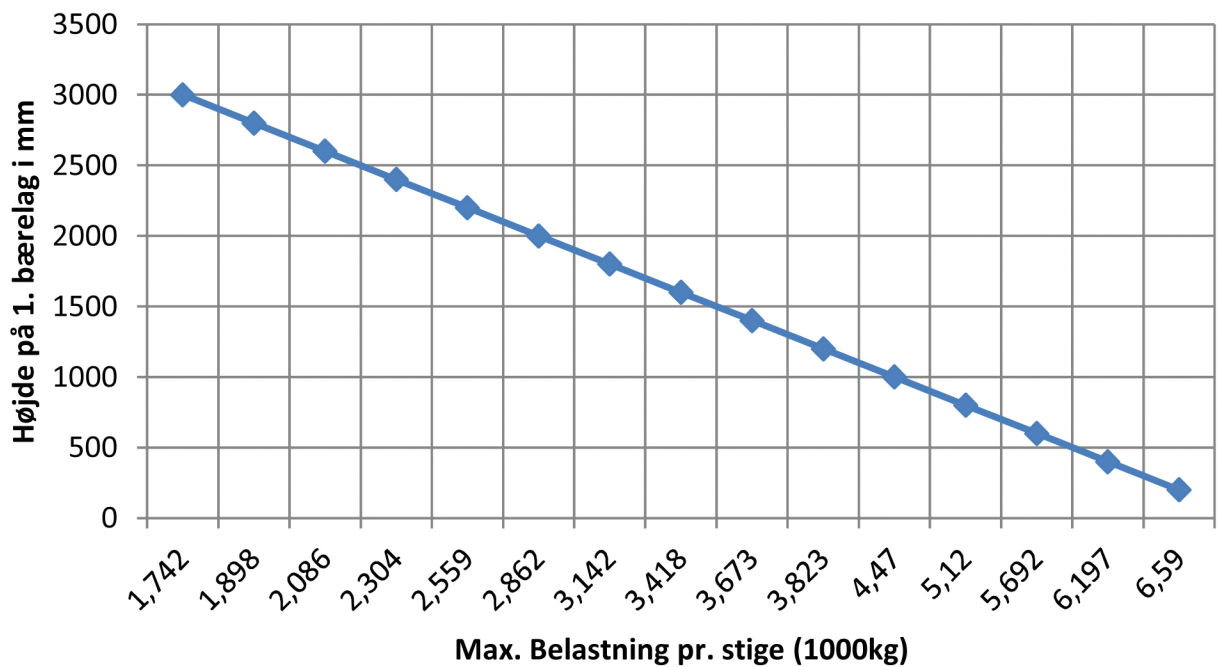

Herover: Belastningsdiagram der viser højden på 1. bærelag kontra max. belastning pr sektion.

IMPORTANT! assumes no responsibility for defects or damage due to carelessness and improper use.